

# Phonak Bolero™ M

Technical Data




## Phonak Bolero M-M (M90/M70/M50/M30)


### SlimTube HE 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

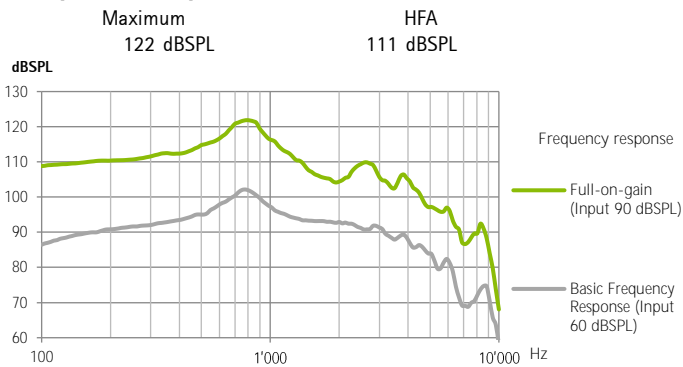


#### Acoustic gain

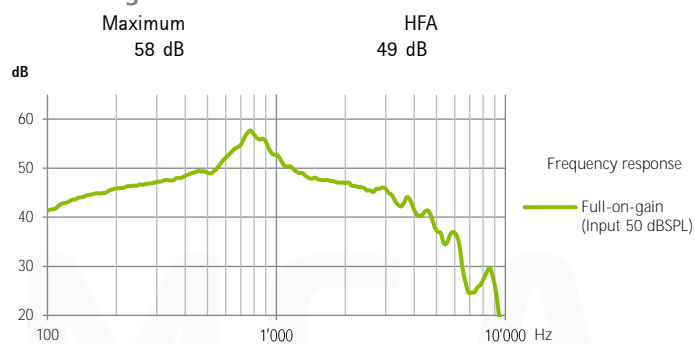

Frequency range	<100 Hz - >6500 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.5%	1.5%	2.0%	1.0%
Battery current	1.5 mA			
Equivalent input noise level	19 dB SPL			


#### Induction coil sensitivity

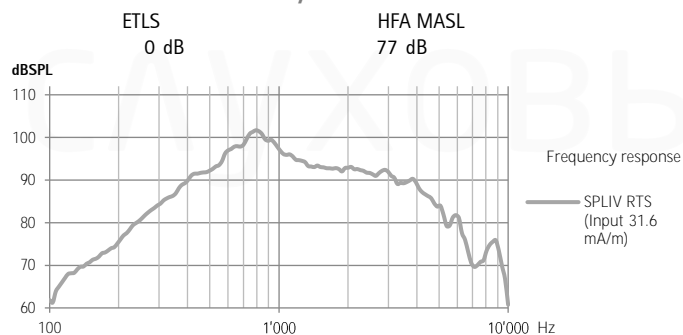


### HE11 680 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

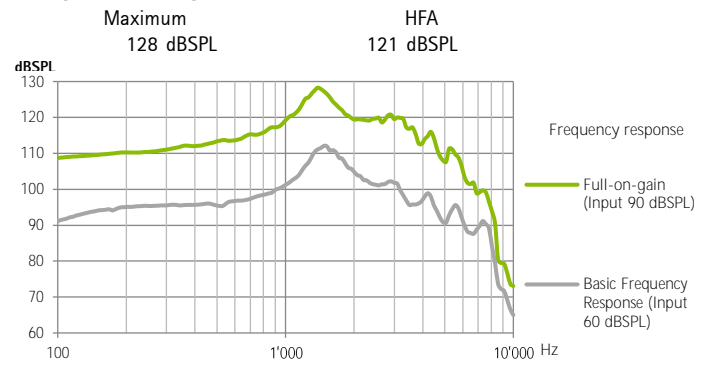


#### Acoustic gain

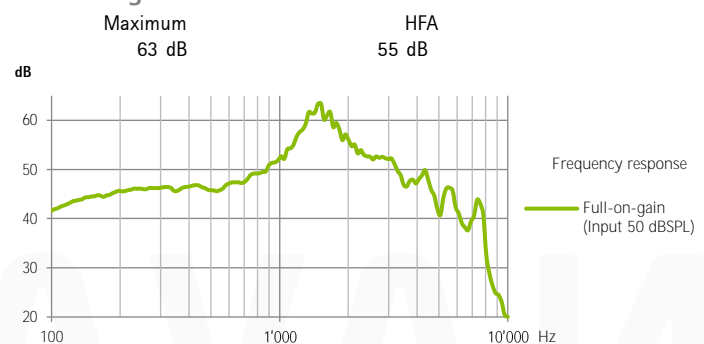

Frequency range	<100 Hz - >8000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	5.0%	3.0%	2.0%	1.0%
Battery current	1.6 mA			
Equivalent input noise level	19 dB SPL			

#### Induction coil sensitivity

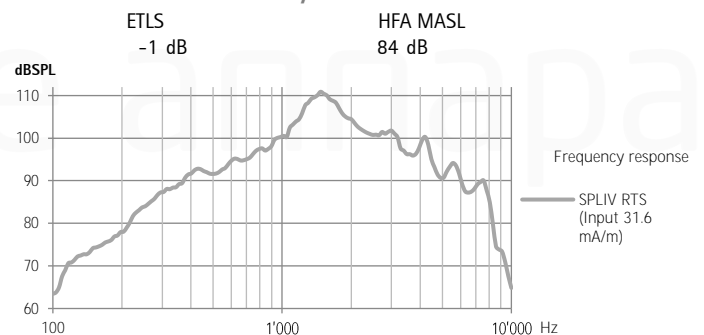

#### General test information

- Supply voltage 1.3 V / impedance 6.2 Ω.
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings

**Warning:** Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid



A Sonova brand

**PHONAK**  
life is on